

# AMSTRAD

## PAIR OF PROFESSIONAL DYNAMIC MICROPHONES

Model DM 701



Suitable for most  
Hi-Fi Tape Decks  
and Recorders.  
Supplied complete  
with 3.5mm and  
standard 6.35mm  
jack fitting and  
generous 2.5m lead



### MICROPHONE DYNAMIC TYPE

Type	Hand Held (Stand)
Sensitivity	15dB (-1V/ $\mu$ bar)
Frequency Response	-78dB (at 1kHz)
Impedance	150-10,000Hz
Capacitance	300 pF
Material	Omnidirectional
Cord Length	Aluminum Alloy
Dimensions	2.5m
	44 $\phi$ x 170.5mm



# AMSTRAD


PAIR OF  
PROFESSIONAL  
DYNAMIC  
MICROPHONES

Model DM 701



Suitable for most  
Hi-Fi Tape Decks  
and Recorders.  
Supplied complete  
with 3.5mm and  
standard 6.35mm  
jack fitting and  
generous 2.5m lead.



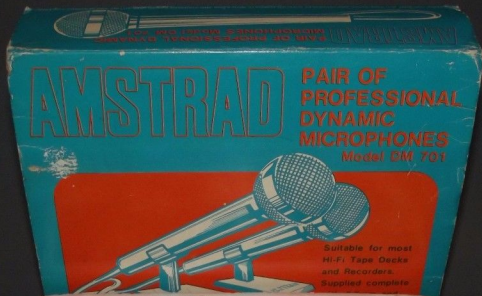

AMSTRAD

PAIR OF PROFESSIONAL DYNAMIC MICROPHONES Model DM 701



Suitable for most Hi-Fi Tape Decks and Recorders. Supplied complete with 3.5mm and standard 6.35mm jack fitting and generous 2.5m lead


AMSTRAD

PAIR OF PROFESSIONAL DYNAMIC MICROPHONES Model DM 701

www.amstrad.com



Suitable for most  
Hi-Fi Tape Decks  
and Recorders.  
Supplied complete  
with 3.5mm and  
standard 6.35mm  
jack leads.

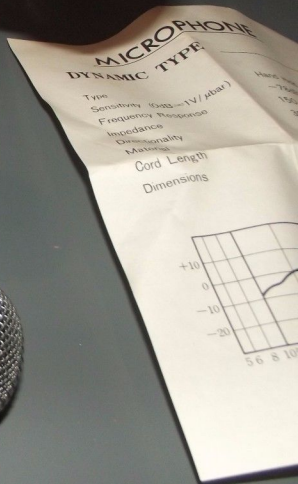

AMSTRAD




AMSTRAD

# MICROPHONE

## DYNAMIC TYPE


Type	Hand Held (Stand)
Sensitivity (0dB=1V/ $\mu$ bar)	-78dB (at 1kHz)
Frequency Response	150~10,000Hz
Impedance	300 $\Omega$
Directionality	Omni directional
Material	Aluminum Alloy
Cord Length	2.5m
Dimensions	44 $\phi$ $\times$ 170.5mm

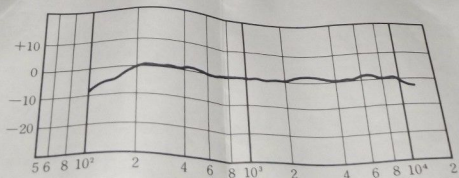



### MICROPHONE DYNAMIC TYPE

Type	Hand Held (Stand)
Sensitivity (200-1000 Hz)	-78dB (at 1kHz)
Frequency Response	150-10,000Hz
Impedance	300 $\Omega$
Directivity	Omni-directional
Material	Nickel-plated Alloy
Cord Length	2.5m
Dimensions	44 g x 170.5mm



Printed in Great Britain (S. 02. 01. 01)





# MSTRAD

## PAIR OF PROFESSIONAL DYNAMIC MICROPHONES

Model DM 701



Suitable for most  
Hi-Fi Tape Decks  
and Recorders.  
Supplied complete  
with 3.5mm and  
standard 6.35mm  
jack fitting and  
generous 2.5m lead

### MICROPHONE DYNAMIC TYPE

Type	Hand Held (Stand)
Sensitivity (0dB = 1V / bar)	-78dB (at 1kHz)
Frequency Response	150 - 10,000Hz
Impedance	300 $\Omega$
Directionality	Omni directional
Material	Aluminum Alloy
Cord Length	2.5m
Dimensions	44# x 170.5mm



