


The Amstrad LQ3500di & LQ5000di Printers

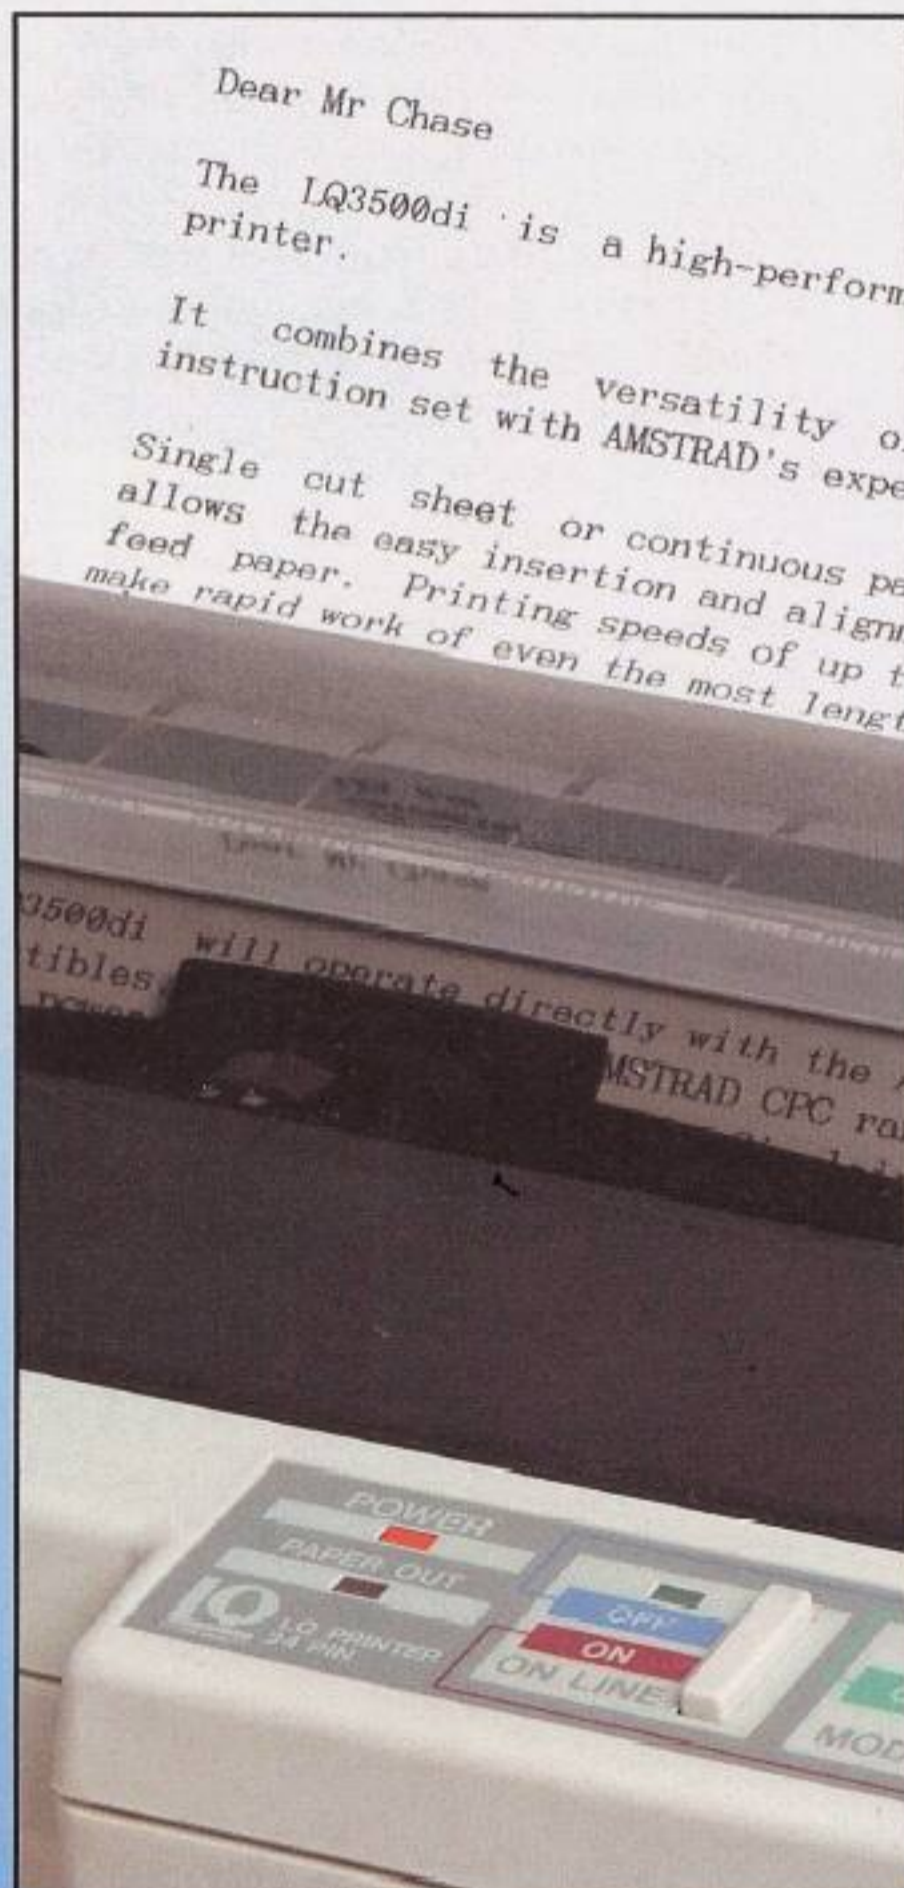


24 Pin Printing
Power From
Amstrad

AMSTRAD

The Amstrad LQ 5000 di Wide Carriage 24 Pin Dot Matrix Printer

Features

- Speed - up to 288 characters per second Draft
- Clarity - up to 96 characters per second Letter Quality
- Accuracy - High resolution graphics capability
- Reliability - Wide carriage heavy duty mechanism
- Flexibility - Inbuilt friction and tractor feed
- Compatibility - Epson LQ and IBM Proprinter compatible
- Connectability - Dual parallel and serial interface

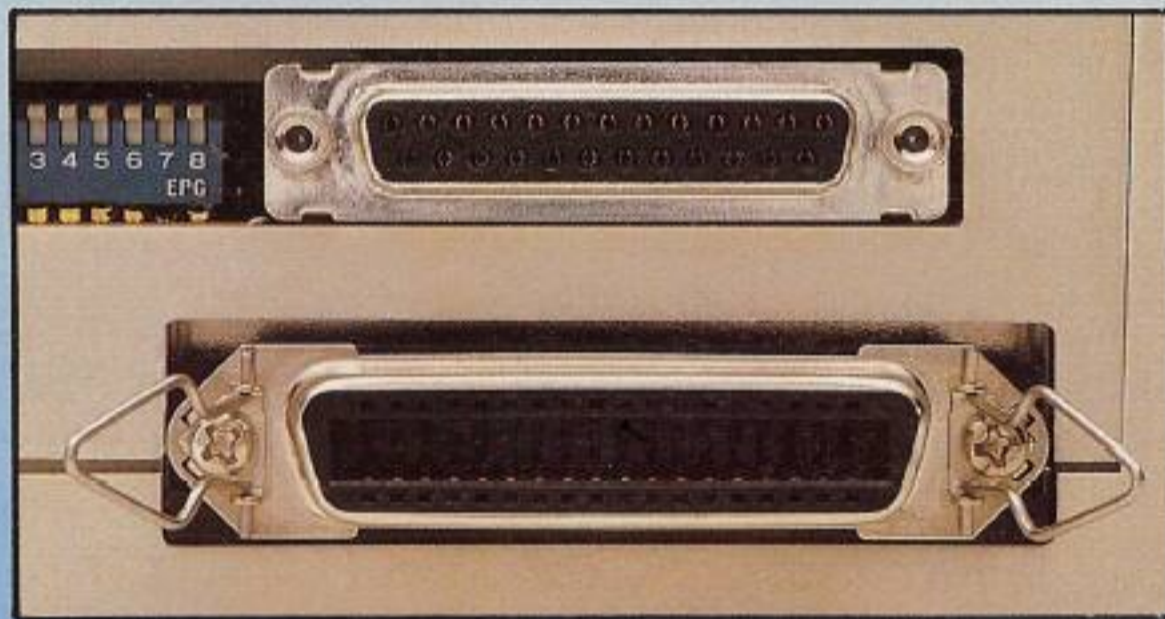

The high performance 24 pin LQ 5000 di provides you with the ideal answer to all your business printing requirements. In draft mode, print speeds of up to 288 cps combine with heavy duty inbuilt tractors and an overall robust design to produce very high paper throughput rates - perfect for number crunching, invoicing, program listing or any other high demand application.

24 pin versatility means that your word processing needs are also fully catered for. The LQ 5000 di gives you crystal-clear letter quality printing for those occasions where top quality output is required - selecting print mode is easily done via the front panel. What's more, the multi-applicational LQ 5000 di offers you ultra-sharp high resolution bit image graphics capabilities as well.

The LQ 5000 di's wide carriage gives you media flexibility - it will happily handle a broad variety of paper widths from between 4 and 15 inches. Naturally enough, it features as standard both friction and tractor paper feeds.


The inclusion of industry standard Epson LQ and IBM Proprinter control codes and graphics sets allows the LQ 5000 di to operate directly with most business software packages, including spreadsheets, word processors and graphics programs.

The LQ 5000 di is fitted with both Centronics parallel and RS232C serial interfaces, making it ideal for use with the Amstrad PC 1512 and PC 1640 series, any other IBM PC compatible, or any computer or terminal fitted with a suitable interface.

The LQ 5000 di wide carriage 24 pin dot matrix printer - unparalleled printing power.

in fact, just over 200 c
a wide range of European
wide selection of mathem
the simultaneous availabil


This is in 17
This is in P
This is in 12 (e
This is in 10 (p
This is in 17D
This is in 12I
is is in 10

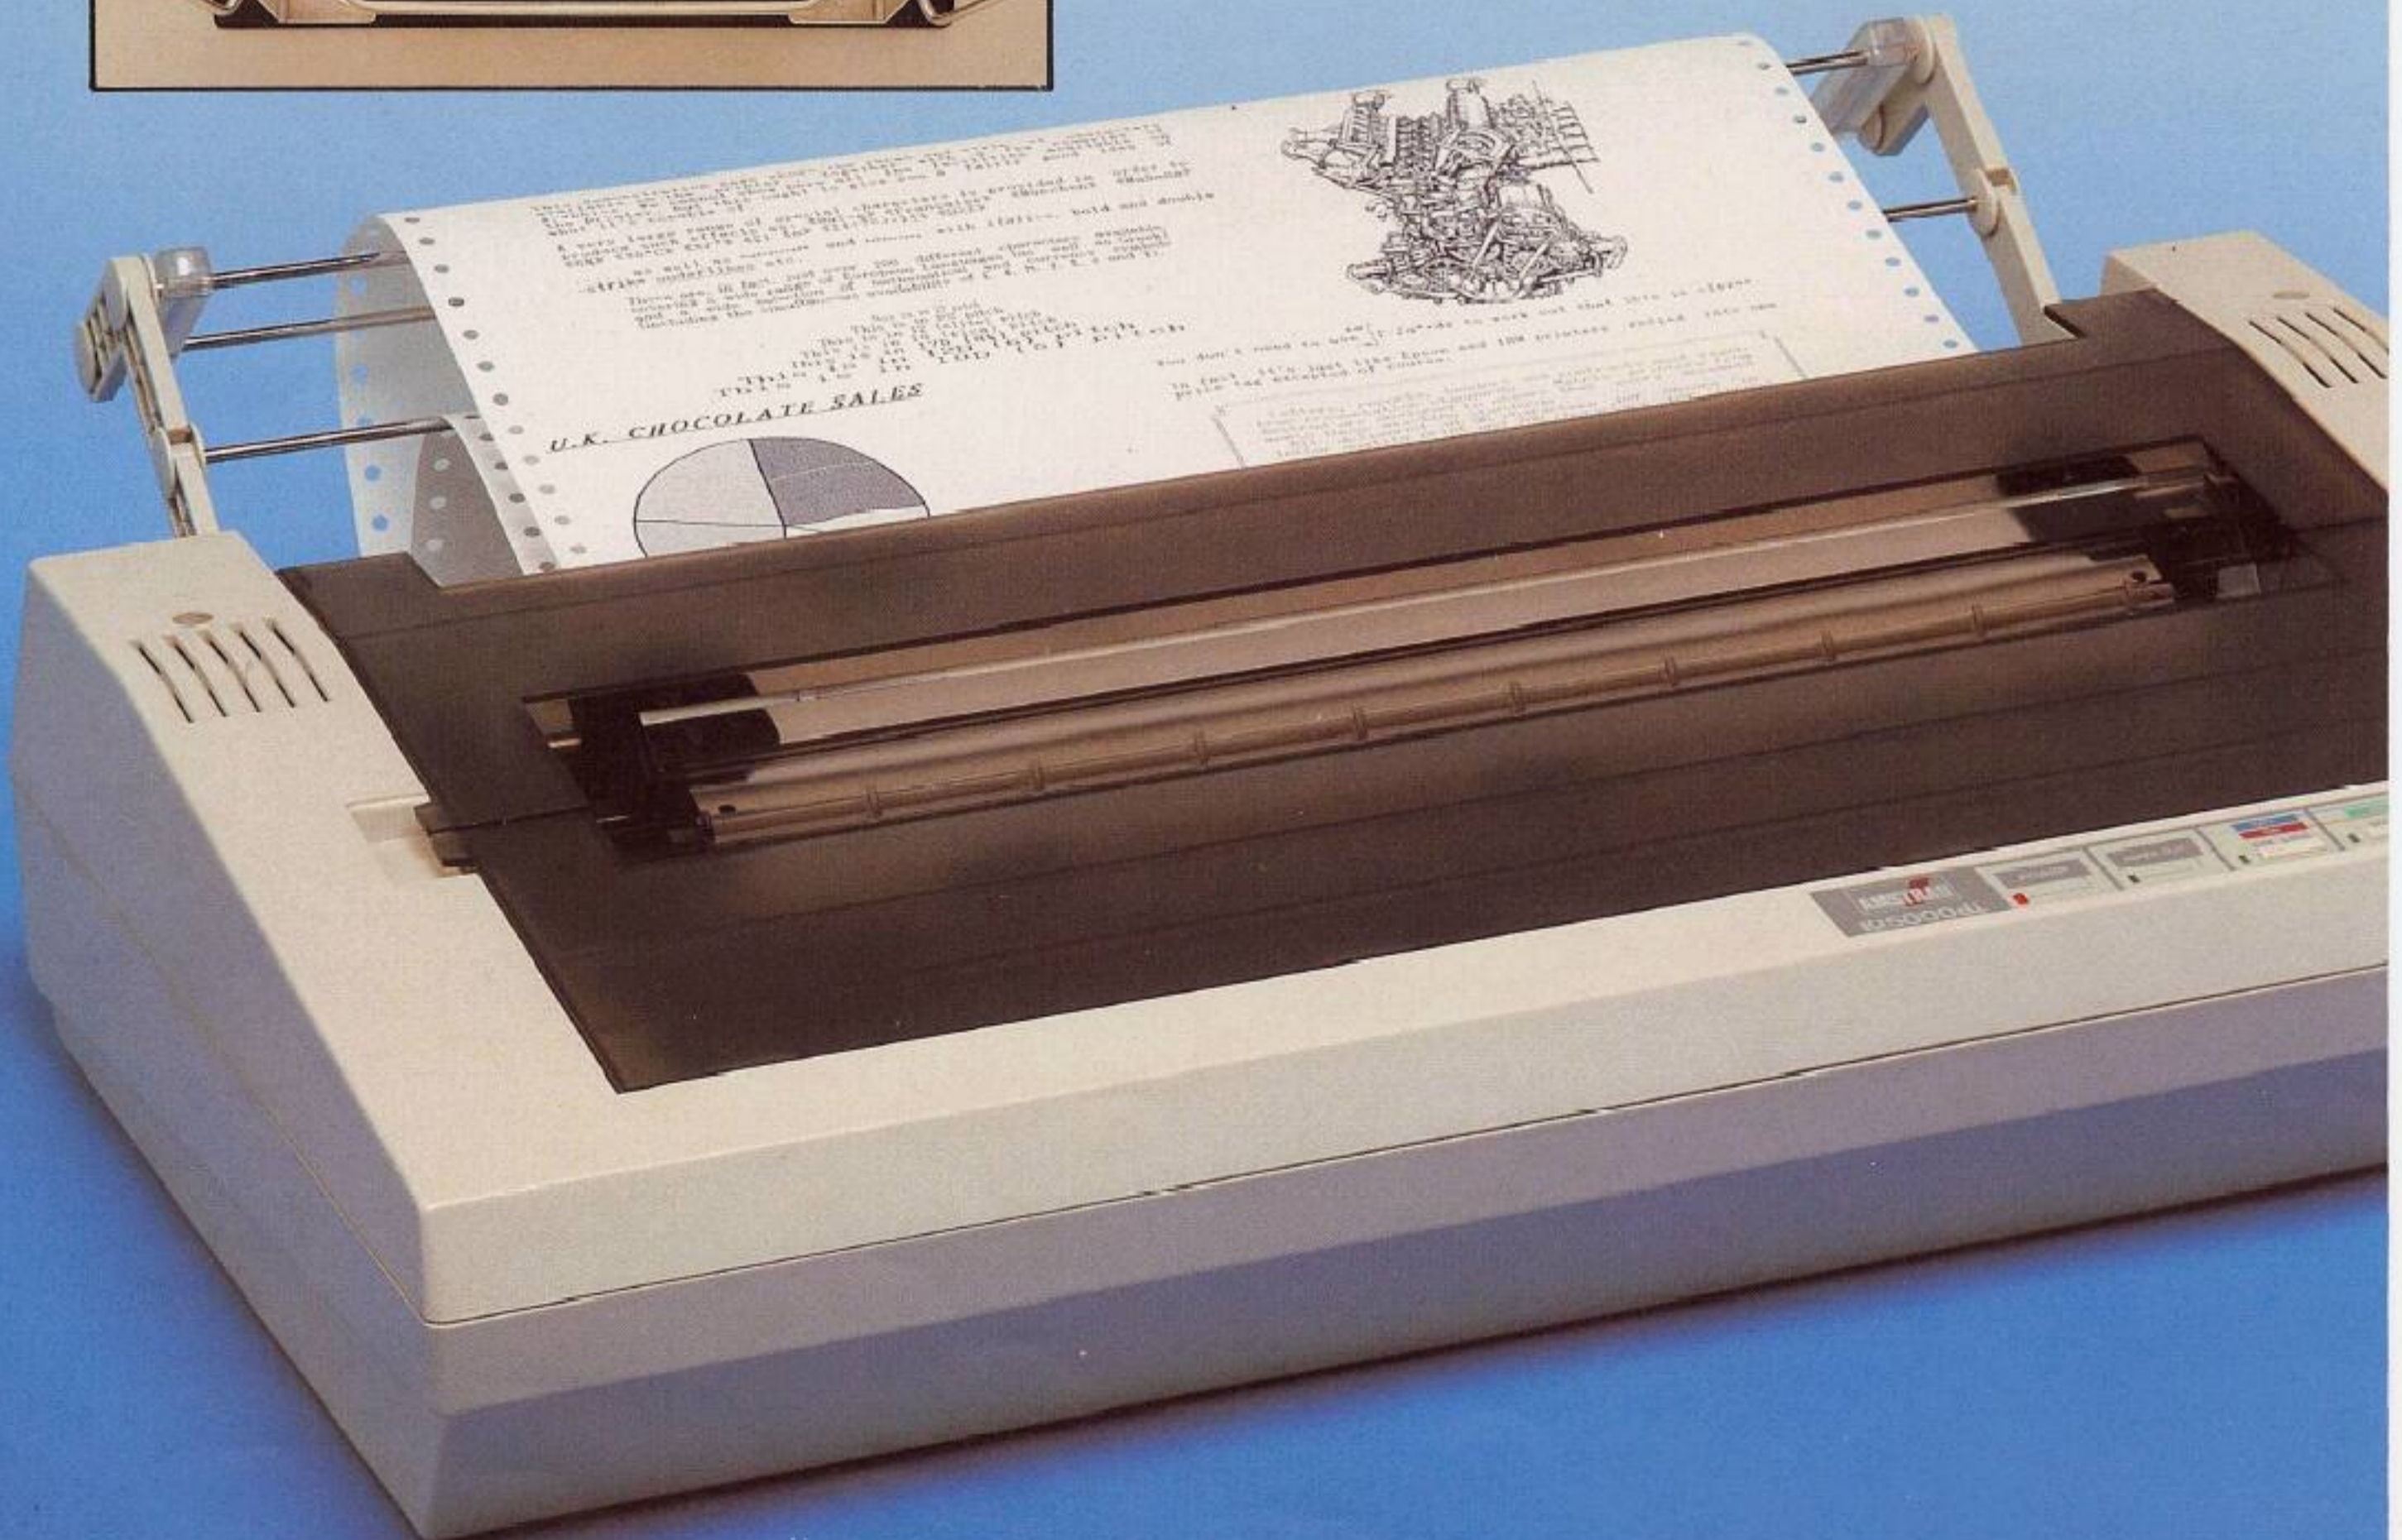

The Amstrad LQ 3500 di Compact 24 Pin Dot Matrix Printer

Features

- Speed - up to 160 characters per second Draft
- Clarity - up to 54 characters per second Letter Quality
- Accuracy - High resolution graphics capability
- Styling - Low profile design and small footprint
- Flexibility - Inbuilt friction feed and clip-on tractor feed
- Compatibility - Epson LQ and IBM PC compatible
- Connectability - Dual parallel and serial interface

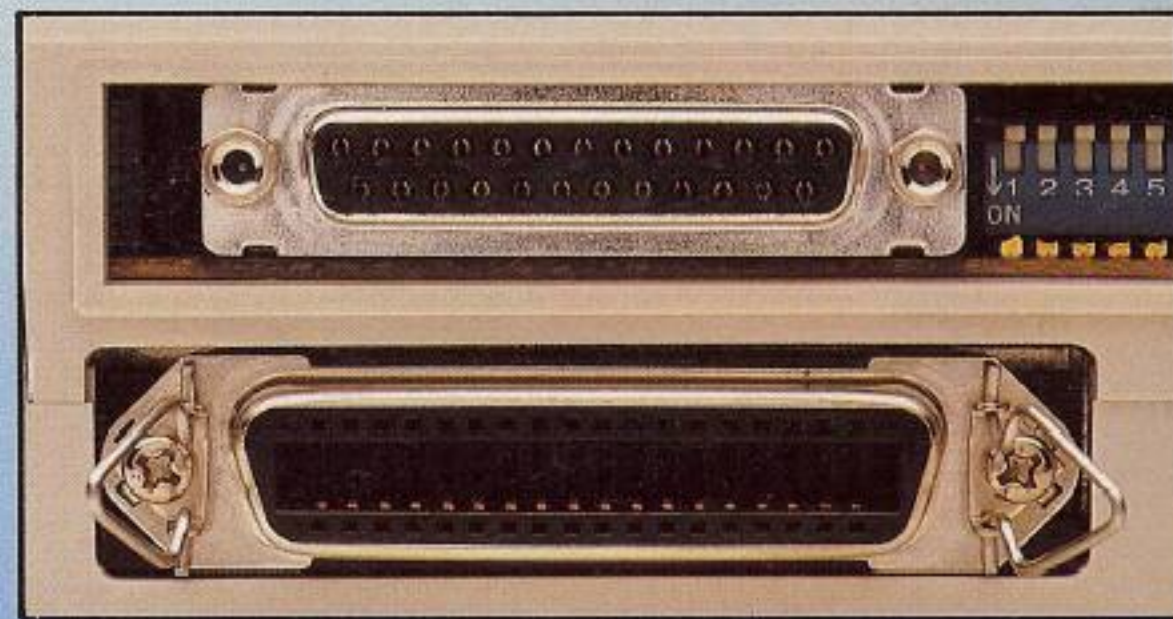

The compact LQ 3500 di offers you 24 pin versatility combined with quality engineering to address all your printing needs. Print speeds of up to 160 characters per second will make short work of even the most lengthy documents - ideal for draft work, number crunching, program listing or any other typical application.

Moreover, whenever you need high standard output, the LQ 3500 di's 24 pin print head will allow you to produce crisp, sharp letter quality text to cater for all your word processing requirements. In addition to this, the fully flexible LQ 3500 di provides you with the opportunity to generate high resolution dot addressable graphics as well.

The LQ 3500 di has been designed with reliability and ease of use as top priorities. It is supplied as standard with friction feed and a clip-on tractor unit for both continuous and cut sheet paper. It also features a single sheet guide with one touch loading, and print quality can be selected from the front panel.

The inclusion of industry standard Epson LQ and IBM PC control codes and graphics sets allows the LQ 3500 di to operate directly with most business software packages, including word processors, spreadsheets and graphics programs.

The LQ 3500 di is fitted with both Centronics parallel and RS232C serial interfaces, making it ideal for use with the Amstrad PC 1512 and PC 1640 series, any other IBM PC

compatible, or any computer or terminal fitted with a suitable interface.

The LQ 3500 di compact 24 pin dot matrix printer - versatility in depth.

different characters available in many languages (as well as mathematical and currency symbols) of £, #, Pt, f, \$, ¢ and

pitch
5 pitch
pica) pitch
(8½) pitch
(6) pitch
(5) pitch



Technical Specifications



The Amstrad LQ5000 di

Print System:	Impact Dot Matrix
Print Head:	24 pin Print Head
Print Speeds:	Draft Mode - up to 288CPS (12cpi) - up to 240CPS (10cpi) NLQ Mode - up to 96CPS (12cpi) - up to 80CPS (10cpi)
Print Direction:	Uni- and Bi-Directional (Selectable)
Print Line Length:	13.6 inch max.
Emulation:	Epson LQ and IBM Proprinter
Character Sets:	96 Character ASCII and Italics (Epson LQ) IBM Character Sets 1 and 2 (inc. graphics) 11 International Character Sets Downloadable Character Capability
Character Size:	2.1mm (W) x 2.55mm (H)
Character Spacing & Columns Per Line:	Standard (Pica) - 10CPI / 136CPL Mini (Elite) - 12CPI / 163CPL Condensed Standard - 17CPI / 236CPL Condensed Mini - 20CPI / 272CPL Proportional - Variable / Variable Double Width Standard - 5CPI / 68CPL Double Width Mini - 6CPI / 81CPL Double Width Condensed - 8.5CPI / 115CPL Double Width Proportional - Variable / Variable
Print Attributes:	Super/Subscript, Double Strike, Italics, Bold, Underline, Double Width.
Graphics Features:	Bit Image Graphics (24 pin and 8 pin mode) Single, Double, High Speed Double, Triple and Quadruple Density
Graphics Resolution:	240 (H) x 216 (V) dots per inch max (IBM Mode) 240 (H) x 180 (V) dots per inch max (Epson Mode)
Line Feed Speed:	0.83IPS
Line Spacing:	1/6 inch, 1/8 inch, 7/72 inch, n/60 inch programmable, n/180 inch programmable, n/72 inch programmable, n/216 inch programmable
Paper Feed:	Friction or Inbuilt Belt Pull Tractors
Paper Width:	4.5 to 15 inches Fanfold (Tractor) 4 to 15 inches Cut Sheet or Roll (Friction)
Number Of Copies:	Original Plus Two
Interface:	Dual Interface Centronics Parallel (7 or 8 bit) RS232C Serial - Baud Rates 150, 200, 300, 600, 1200, 2400, 4800, 9600 bits per second.
Buffer Size:	8 Kilobytes
Power Requirements:	220 - 240 Volts AC 50Hz
Physical Dimensions:	24 in (W) x 15 in (D) x 5 in (H) (615 x 375 x 135 mm)
Weight:	7.5 kg



The Amstrad LQ3500 di

Print System:	Impact Dot Matrix
Print Head:	24 pin Print Head
Print Speeds:	Draft Mode - up to 160CPS (12cpi) - up to 135CPS (10cpi) NLQ Mode - up to 54CPS (12cpi) - up to 45CPS (10cpi)
Print Direction:	Uni- and Bi-Directional (Selectable)
Print Line Length:	8 inch max.
Emulation:	Epson LQ and IBM PC Graphics Printer
Character Sets:	96 Character ASCII and Italics (Epson LQ) IBM Character Sets 1 and 2 (inc. graphics) 11 International Character Sets Downloadable Character Capability
Character Size:	2.1mm (W) x 2.55mm (H)
Character Spacing & Columns Per Line:	Standard (Pica) - 10CPI / 80CPL Mini (Elite) - 12CPI / 96CPL Condensed Standard - 17CPI / 136CPL Condensed Mini - 20CPI / 160CPL Proportional - Variable / Variable Double Width Standard - 5CPI / 40CPL Double Width Mini - 6CPI / 48CPL Double Width Condensed - 8.5CPI / 68CPL Double Width Proportional - Variable / Variable
Print Attributes:	Super/Subscript, Double Strike, Italics, Bold, Underline, Double Width.
Graphics Features:	Bit Image Graphics (24 pin and 8 pin mode) Single, Double, High Speed Double, Triple and Quadruple Density
Graphics Resolution:	240 (H) x 180 (V) dots per inch max.
Line Feed Speed:	0.83IPS
Line Spacing:	1/6 inch, 1/8 inch, n/60 inch programmable, n/180 inch programmable.
Paper Feed:	Friction or Clip-on Pull Tractor
Paper Width:	4.5 to 10 inches Fanfold (Tractor) 4 to 9.5 inches Cut Sheet or Roll (Friction)
Number Of Copies:	Original Plus One
Interface:	Dual Interface Centronics Parallel (7 or 8 bit) RS232C Serial - Baud Rates 150, 200, 300, 600, 1200, 2400, 4800, 9600 bits per second.
Buffer Size:	8 Kilobytes
Power Requirements:	220 - 240 Volts AC 50Hz
Physical Dimensions:	17.5 in (W) x 16 in (D) x 4 in (H) (440 x 400 x 100 mm)
Weight:	5.9 kg

In keeping with our policy of continually improving our service and the technical quality of our products, we reserve the right to change component type, manufacturers, sources of supply and technical specifications at any time. Dimensions, speeds, weights and colours contained in this brochure are approximate. Products may be altered without notice at any time. Products subject to availability.

Nothing contained in this brochure or price list is intended to extend any warranty or representation, express or implied, with regard to the products and services described.

AMSTRAD

Amstrad Plc.
Brentwood House, 169 Kings Road,
Brentwood, Essex. CM14 4EF
Telephone: 0277 230222

© May 1988 Amstrad Plc
All rights reserved.

The name and logo Amstrad
are registered trade marks of Amstrad Plc



NEU

AMSTRAD LQ 3500/LQ 5000 24-Nadeldrucker

LQ 3500:

DM **899.-**

unverbindl. Preisempfehlung

LQ 5000:

DM **1.399.-**

unverbindl. Preisempfehlung
(ohne Abbildung)



AMSTRAD

AMSTRAD 24-Nadeldrucker LQ 3500/LQ 5000

Die beiden 24-Nadel Schönschriftdrucker für Ihr Büro, kompatibel zum Industriestandard. Konzipiert für Arbeitsplätze, an denen hochwertige Ausdrücke verlangt werden, erfüllen sie höchste Ansprüche in Darstellungsqualität und Ausdauer! Zwei 24-Nadel Drucker zu einem außergewöhnlichen Preis-/Leistungsverhältnis!

Ihre Texte werden automatisch in einen Zwischenspeicher von 7 KB geladen, von wo aus sie dann ausgedruckt werden. Dadurch können Sie Ihre Texte am Bildschirm bereits während des Druckvorganges weiterbearbeiten. Beide Drucker verfügen über 6 Schriftarten in der Grundeinstellung, die Sie entsprechend Ihren individuellen Anforderungen verändern können. Ihre Texte erhalten dadurch das Aussehen, das Sie sich vorstellen. Auch Durchschläge sind dabei selbstverständlich. Der LQ 5000 verfügt über einen

breiten Papiereinzug zur übersichtlichen Darstellung von Tabellen und Kalkulationen. Beide Drucker sind serienmäßig mit Endlostraktor und Einzelblattzuführung ausgestattet. Zusätzlich kann ein automatischer Einzelblatteinzug verwendet werden.

Die Druckgeschwindigkeit liegt bei beiden Druckern bei 160 CPS (Zeichen pro Sekunde), und das bei einer außerordentlich niedrigen Geräusentwicklung.

Bedienungsfreundliche Front-Panels ermöglichen Ihnen, alle wichtigen Funktionen direkt auszuführen.

Die Drucker der LQ-Serie sind die Drucker für den professionellen Dauereinsatz, in dem höchste Qualität gefordert wird.

Vergleichen Sie, wir dürfen es leider nicht!

Technische Daten:

Drucker LQ 3500:

Drucksystem:	24-Nadel-Matrixdrucker
Druckgeschwindigkeit:	160 Zeichen/s, 12 CPI 135 Zeichen/s, 10 CPI
Schönschrift:	54 Zeichen/s, 12 CPI 45 Zeichen/s, 10 CPI
Zeilenabstand:	1/6", 1/8", 7/72" programmierbar N/216", N/72"
Papierbreite:	4-10"
Durchschläge:	1 Original plus 1 Kopie
Schnittstelle:	Parallel (Centronics)
Puffergröße:	7 KB
Maße:	44 x 40 x 10 cm (B x T x H)
Gewicht:	5,9 kg
Papierzuführung:	Traktor Einzelblattzuführung halbautomatisch. Automatischer Einzelblatteinzug (optional)

Drucker LQ 5000:

Drucksystem:	24-Nadel-Matrixdrucker
Druckgeschwindigkeit:	288 Zeichen/s, 12 CPI 240 Zeichen/s, 10 CPI
Schönschrift:	96 Zeichen/s, 12 CPI 80 Zeichen/s, 10 CPI
Zeilenabstand:	1/6", 1/8", 7/72" programmierbar N/216", N/72"
Papierbreite:	4-15"
Durchschläge:	1 Original plus 1 Kopie
Schnittstelle:	Parallel (Centronics)
Puffergröße:	7 KB
Maße:	60 x 40 x 13 cm (B x T x H)
Gewicht:	7,5 kg
Papierzuführung:	Traktor Einzelblattzuführung halbautomatisch. Automatischer Einzelblatteinzug (optional)

Preis:

LQ 3500 DM **899,-***

Saturn-Hansa
Handels GmbH
Bergerstr. 125 - 129
6000 Frankfurt/M. 60
Tel. 069 / 4 05 01-0
Telex 0416578

LQ 5000 DM **1.399,-***

* unverbindliche Preisempfehlung
Technische Änderungen vorbehalten
88-10-19/3.88

AMSTRAD GmbH
Robert-Koch-Straße 5
6078 Neu-Isenburg



AMSTRAD